




加防水圖示意图





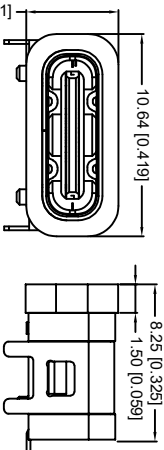


NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 5 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES
- WATER PROOFNESS: THISPRODUCTS BASED ON IPX8.

(防水等級IPX8 1.5米深 30分钟)

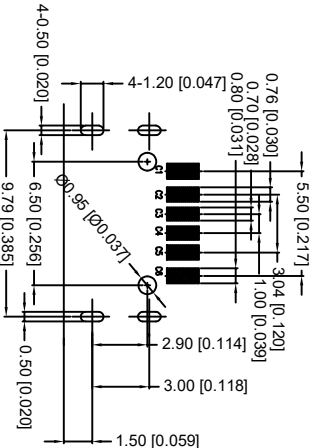

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

6	材料	材质	BLACK	1P2S
5	SHELL	STAINLESS STEEL	NI Plated	1P2S
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1P2S
3	CONTACT	COPPER ALLOY (C40)	TIN/AGNI Plated	1P2T
2	外壳	PA66	BLACK	1P2S
1	接口	LCP	BLACK	1P2S
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

U262-06XN-4BFC11

- 1: 0.8u"
2: 5u"
3: 10u"
4: 3u"
- W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	PART NO.: USB31-06XN-4BSK10
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	WEIGHT
		SHEET
		1/1
		REVISION
		A0

ΔX		ANGULAR	±5°
ΔX		L ≤ 4	±0.2
ΔX		4 < L ≤ 16	±0.3
ΔX		16 < L ≤ 63	±0.4
MARK		L > 63	±0.5
TOLERANCE UNSPECIFIED ±0.05mm			
REVISIONS			
DESCRIPTION	DATE	REVISED	APPROVED
UNSPECIFIED TOLERANCES			