


### FEATURES

1. Ultra-wide 85 - 305VAC and 70 - 430VDC input voltage range
2. Operating ambient temperature range -40°C to +85°C
3. Compact size, open frame
4. High reliability, green power
5. Industrial-grade design
6. Flexible selection of EMC additional circuits, simplify customer PCB layout
7. Output short circuit, over-current protection



**3 years  
Warranty**

### Selection Guide

Part No.	Output Power	Nominal Output Voltage and Current(Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
RAS01-K3B05SS	1W	5V/200mA	57	500
RAS03-K3B12SS	3W	12V/250mA	73	330

Warning: Non-isolated power supply, there is no insulation protection between output and input dangerous voltage, beware of electric shock!

### Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	-	305	VAC
	DC input	70	-	430	VDC
Input Frequency		47	-	63	Hz
Input Current	115VAC	-	-	0.12	A
	277VAC	-	-	0.06	
Inrush Current	115VAC	-	25	-	
	277VAC	-	40	-	
Recommended External Input Fuse		1A/300V, slow-blow, required			
Hot Plug		Unavailable			

### Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	10% - 100% load	5V	-	±1.5	-7~+3	%
		12V	-	±2.5	-5~+8	
Line Regulation	Rated load	5V	-	±1.5	-	
		12V	-	±1	-	
Load Regulation	5V	-	±2.5	-		
	12V	-	±2	-		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	-	80	150	mV	
Temperature Coefficient		-	±0.12	-	%/°C	
Stand-by Power Consumption	230VAC input	5V	-	-	0.3	W
		12V	-	-	0.4	
Short Circuit Protection		Hiccup, continuous, self-recovery				
Over-current Protection		≥110% Io, self-recovery				
Minimum Load		10	-	-	%	

Note: \* The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		-40	-	+85	°C
Storage Temperature		-40	-	+105	
Storage Humidity		-	-	95	%RH
Soldering Temperature	Wave-soldering	260 ± 5°C; time: 5 - 10s			
	Manual-welding	360 ± 10°C; time: 3 - 5s			
Power Derating	-40°Cto -20°C	2	-	-	%/ <sup>o</sup> C
	+70°Cto +85°C	2.67	-	-	
	85VAC - 110VAC	0.8	-	-	%/ <sup>o</sup> VAC
	277VAC - 305VAC	1.1	-	-	
Safety Standard		BS EN62368-1/EN62368-1 (Report) Safety Approval; Design refer to IEC/UL62368-1			
MTBF		MIL-HDBK-217F@25°C>300,000 h			



### Mechanical Specifications

<b>Dimension</b>	16.13 x 15.10 x 9.50 mm
<b>Weight</b>	4.2g (Typ.)
<b>Cooling method</b>	Free air convection

### Electromagnetic Compatibility (EMC)



<b>Emissions</b>	CE	CISPR32/EN55032	CLASS A (See Fig. 1 for typical application circuit)	
		CISPR32/EN55032	CLASS B (See Fig. 2 for recommended circuit)	
	RE	CISPR32/EN55032	CLASS A (See Fig. 1 for typical application circuit)	
		CISPR32/EN55032	CLASS B (See Fig. 2 for recommended circuit)	
<b>Immunity</b>	ESD	IEC/EN61000-4-2	Contact ± 6KV/Air ± 8KV (See Fig. 1 for typical application circuit)	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m (See Fig. 2 for recommended circuit)	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (See Fig. 1 for typical application circuit)	perf. Criteria B
			±4KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±1KV (See Fig. 1 for typical application circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s(See Fig. 2 for recommended circuit)	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70% (See Fig. 2 for recommended circuit)	perf. Criteria B

### Product Characteristic Curve

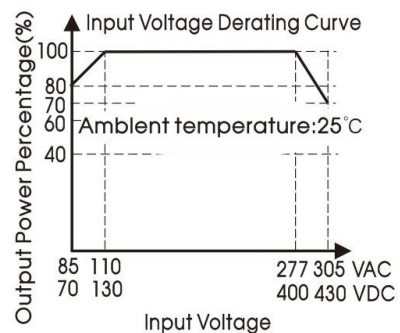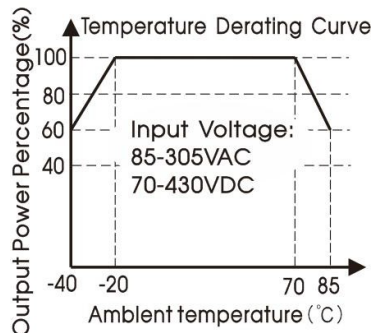

**Note:**

- ① With an AC input between 85 - 110VAC/277- 305VAC and a DC input between 70 - 130VDC/400 - 430VDC, the output power must be derated as per temperature derating curves;
- ② This product is suitable for applications using natural air cooling

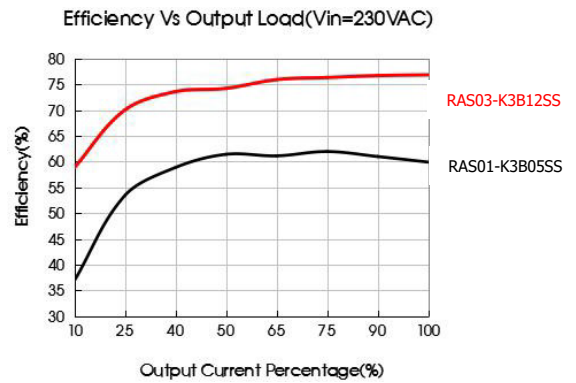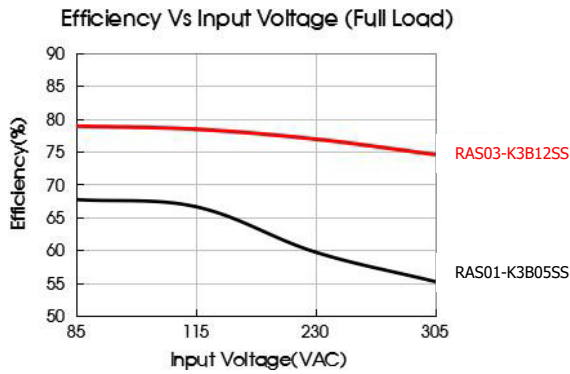

## Design Reference

### 1. Typical application

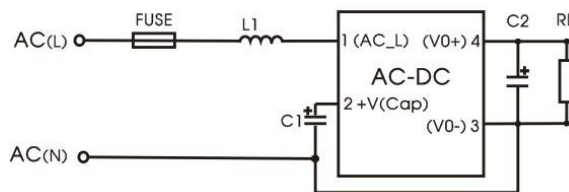


Fig. 1

Part No.	FUSE (required)	C1 (required)	C2 (required)	L1 (required)
RAS01-K3B05SS	1A/300V	10uF/400V: 165-264VAC	220uF/16V	1.2mH
RAS03-K3B12SS		10uF/450V: 165-305VAC 22uF/400V: 85-264VAC 22uF/450V: 85-305VAC		

**Note:**

C1 is used as filter capacitor(required), if the surge immunity index is to be met, the C1 capacitor needs to be connected to 22uF; Output filter: We recommend using an electrolytic capacitor with high frequency, high ripple current and low ESR rating for C2 refer to manufacture's datasheet). Combined with L1, they form a pi-type filter circuit. Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%.

### 2. EMC compliance recommended circuit



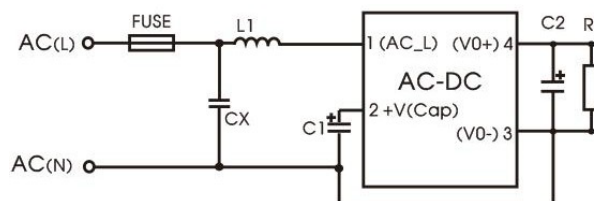


Fig. 2

Components	Recommend Parameter
CX	0.1uF/310VAC
L1	1.2mH
FUSE (required)	1A/300V, slow-blow, required
C1 (required)	10uF/400V: 165-264VAC 10uF/450V: 165-305VAC 22uF/400V: 85-264VAC 22uF/450V: 85-305VAC
C2 (required)	220uF/16V

### Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

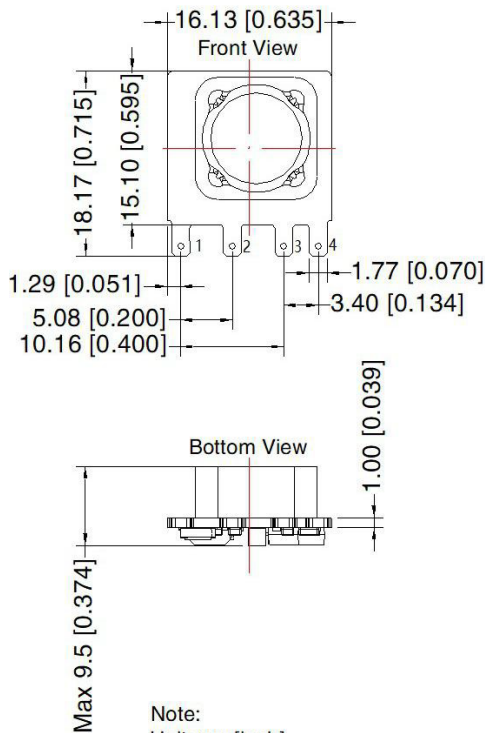

Note: Grid: 2.54\*2.54mm

Pin-Out	
Pin	Function
1	AC(L)
2	+V(CAP)
3	AC(N)/-Vo
4	+Vo

Note:  
 Unit: mm[inch]  
 Pin section tolerances:  $\pm 0.10 [\pm 0.004]$   
 General tolerances:  $\pm 1.0 [\pm 0.04]$   
 The layout of the device is for reference only,  
 please refer to the actual product

### Notes & Instructions

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at  $T_a=25^\circ\text{C}$ , humidity <75%RH, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;

#### NORPAS-POWER TECHNOLOGY CO., LTD.

www.norpas-power.com Mail: info@norpas-power.com

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.norpas-power.com

REV:07/2024