

Xiamen Lineyi Electronics

P/N: SMA-KE-G , (SMA straight, PCB socket, gold plating)

Features:

Working temperature: -61~ 165 degree centigrade

Vibration: MIL-STD-202, method 213

Impedance: 50 ohms

Frequency: DC-12.4GHz

Current: 335V Max

Withstand current: 1000V rms


Contact resistance: inner conductor  $\leq 3$ mohms

Outer conductor  $\leq 2$ mohms

Insulation resistance:  $\geq 500$ mohms

Durability:  $\geq 300$  cycles

Gold plating

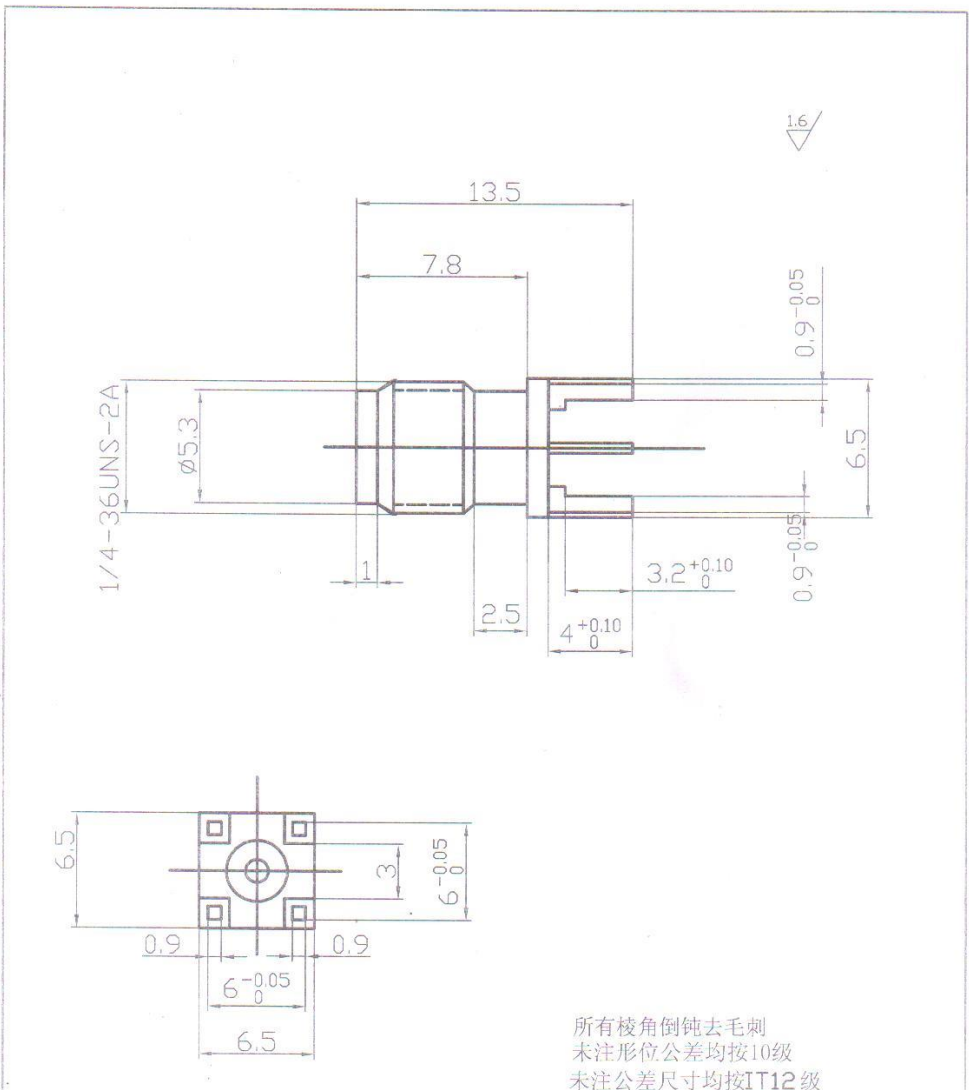

所有棱角倒钝去毛刺  
未注形位公差均按10级  
未注公差尺寸均按IT12级

					涂镀					
					SMA-KE(正四脚) 成品		图号	KEX8.034.018-1		
更改 标记	数量	签名	日期	文件号	材料		重量	比例	规格	
设计							共	张	第	张
绘制										
审核										
批准										
旧底图										