
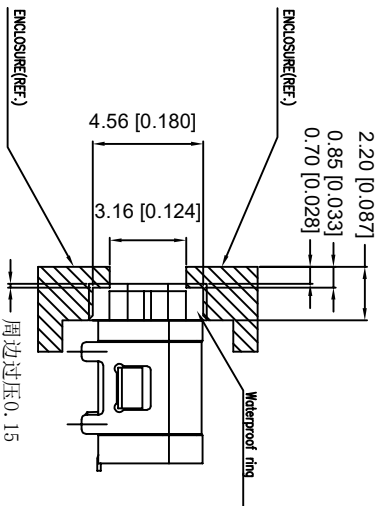
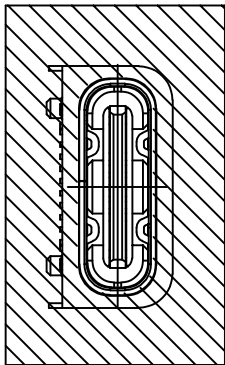

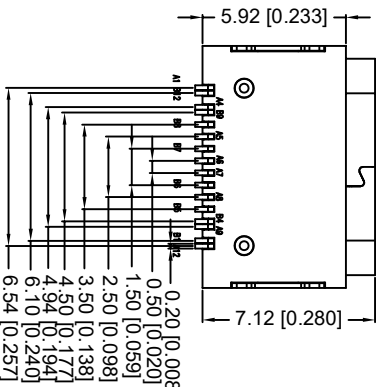
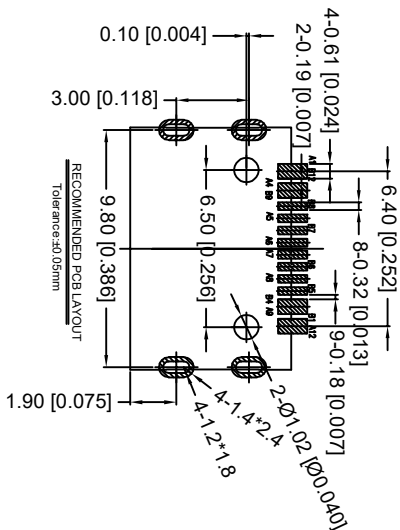
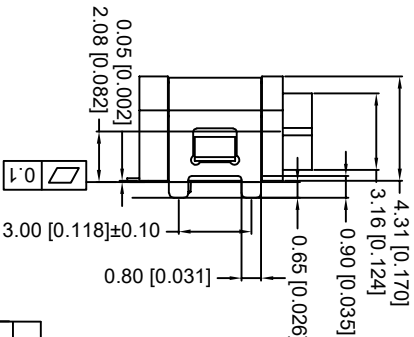
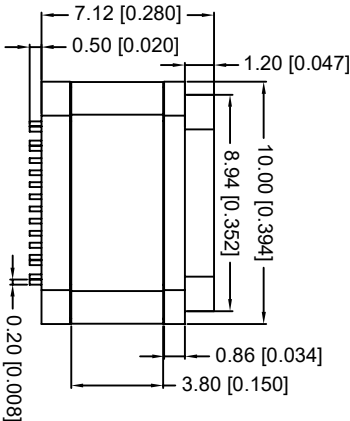


RECOMMENDED SCHEMATIC DRAWING OF CONNECTOR MATCH CHASSIS

NOTES:
SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 20 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: 6N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8(1.5M 30min).

(防水等级IPX8 1.5米深 30分钟)

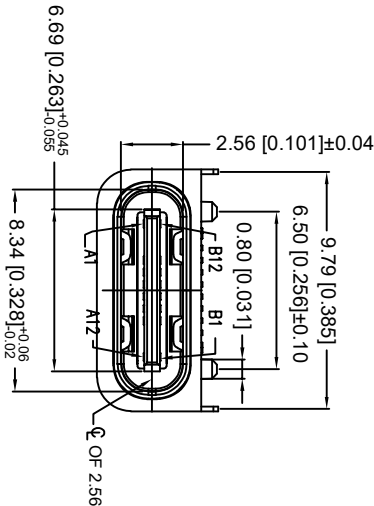

6	Run-RING	IPC5	Silver gel	BLACK
5	SHELL	IPC5	STAINLESS STEEL	NI Plated 60U~100U
4	SHIELDING PLATE	IPC5	STAINLESS STEEL	NI Plated 60U~100U
3	CONTACT	18BT	Brass	Copper Plating Au(0.5~3um) Soldering Plating Au(1um)
2	Pin	IPC5	PA66	BLACK
1	PCB	IPC5	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	REMARKS

USB TYPE-C PIN ASSIGNMENTS			
PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	D+1	B7	D-2
A7	D-1	B6	D+2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	
CHKD	UNIT: mm/in	
APPD	SIZE: A4	

PART NO.:
USB31-16XN-4BSK16

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0