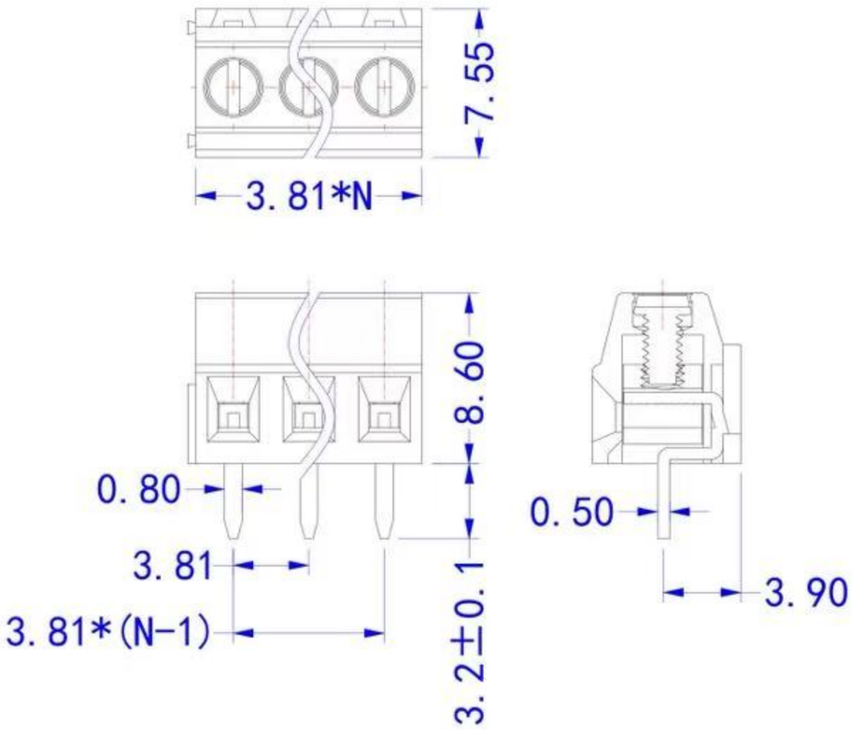

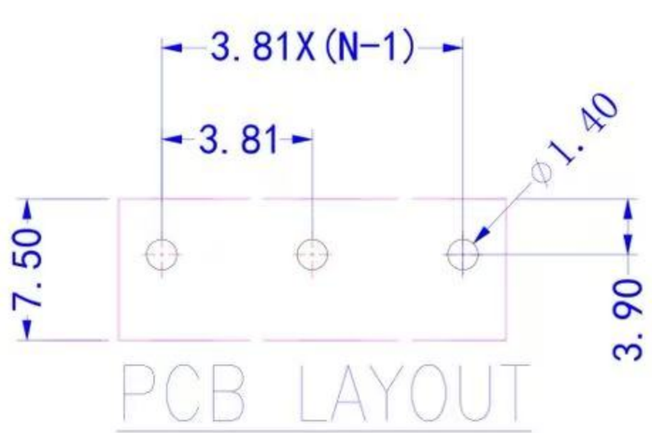

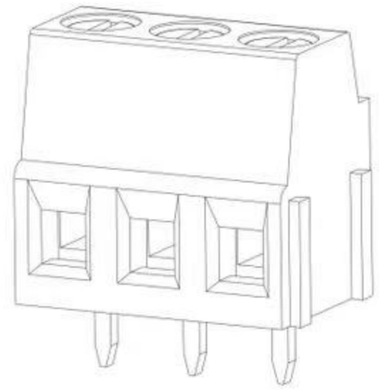

Material
Screw:M2.0,steel,Zinc plating
Square:Brass,Nickel plating
Terminal:Brass,Tin plating
Housing:PA66,UL94V-0

Electrical
Rated Voltage:300V(UL),130V(IEC)
Rated Current:10A(UL),10A(IEC)
Withstand Voltage:AC1250V/1Min
Wire Range:26-16AWG 0.5-1.0mm²

Mechanical
Temp. Range:-40° C/+105° C
Max Soldering:+250° C 5Sec.
Torque:0.2Nm:(1.771b.in)
Strip Length:5.0-6.0mm

间距公差/Spacing tolerance(mm)			
0---5	6---12	13---24	0.1/10
±0.15	±0.30	±0.50	∠ ±2°

未注公差/General tolerances(mm)				
0---30	31---50	51---80	81---120	>121
±0.30	±0.50	±0.70	±1.05	±1.20

慈溪市云佳电子有限公司

STATUS	APPD	CHKD	DRFT	DATE	CUSTOM	PROJECT	UNITS	SCALE
	ZH			2022.4.29			MM	

YJ128-3.81

DRAWING NO:

TYPE:CUSTOMER DRAWINGS

REV	SIZE	SHEET
A	A4	1/1