

NEOWAY N717-EA

Ideal solution for IoT Applications

- LTE Cat 1 module optimized for M2M and IoT applications
- AT Standard version with cellular network connection and 2G backward.
- B31 Band Support for Smart Meter or Industrial Market



Chipset

ASR 1603s

N715-EA is Neoway 2nd-Generation LTE Cat.1 module that specifically support Band31 connection and 2G network. Which would be much suitable for the smart meter and Industrial market. It Adopts the 3GPP Rel.13 LTE technology, which could deliver 10Mbps downlink and 5Mbps uplink data rates.



Operating temperature

-40°C to +85°C, industrial grade

This module has an excellent RF performance. It supports low power consumption and ultra wide operating temperature range. N717-EA supports various network protocols and provides industrial grade interfaces. N717-EA is an optimal option for energy metering, telematics, industrial router, industrial PAD, video surveillance, environmental monitoring, etc.



Various protocols

TCP/IP/UDP IoT protocols

The N717-EA can be used in regions including European country where LTE networks are deployed.




Compact package

LGA package
29 mm × 25 mm × 2.35 mm



Technical support

Reference designs, evaluation kits
Timely support via emails, calls, and IM
Field support

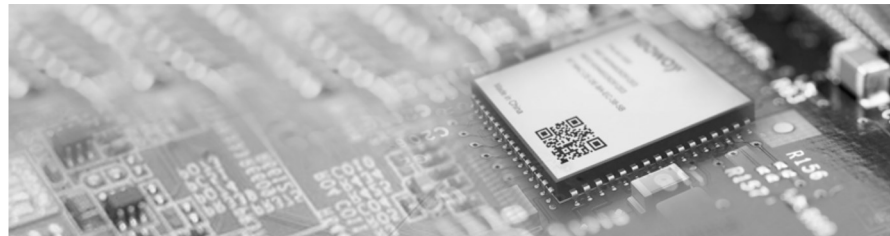

N717-EA LTE Cat 1

Ideal solution for IoT Applications

Specifications

N717-EA	LTE-FDD: B1, B3, B5, B7, B8, B20, B28, B31 LTE-TDD: B34, B40, B41
Supply voltage	3.4 to 4.2 V(DC), Typ.: 3.6V
Operating temperature	-40°C to +85°C
Dimensions	(29.0±0.1)mm× (25.0±0.1)mm× (2.35±0.15)mm
Package	LGA(126 pin)
Power consumption	TBD
AT	3GPP TS 27.007, 27.005 Neoway enhanced AT commands
CPU	ARM A5, 500 MHz main frequency
Memory	RAM: 128 Mb ROM: 64 Mb

Interfaces

POWER, PWRKEY_N, RESET_N
USB2.0, UART
PCM, I2C, GPIO
1.8V/3.0V USIM interface
NET_LIGHT
Cellular antenna interfaces

Certification Approvals

CE*, RoHS*

* indicates in development

Features

Data rate	GPRS: Max 85.6 kbps (DL)/Max 85.6 kbps (UL) FDD-LTE: Cat1, Max 10 Mbps (DL)/Max 5 Mbps (UL) TDD-LTE: Cat1, Max 8 Mbps (DL)/Max 2 Mbps (UL)
SMS	TEXT/PDU Point to Point/Cell Broadcast
Network protocols	TCP/UDP/MQTT/PPP/NTP/FTP /HTTP/ HTTPS/SSL/TLS
Firmware upgrade	Via USB or FOTA
USB Driver	Windows 7/8/8.1/10 Linux 2.6 ~ 4.4 Android 4.x/5.x/6.x/7.x/8.x/9.x

Enhanced Features

4G antenna, 50Ω characteristic impedance
Two UART interfaces, one of which supports hardware flow control
Two USIM interface, compatible with 1.8V/3.0V USIM cards
One USB2.0 high-speed interface
One I2C interface
Dual-USIM-single-standby (Optional)*
Differential Firmware Over-the-Air (DFOTA)
GPRS
VoLTE
MCU software OTA*

Neoway Technology Co., Ltd.

Technical support: support@neoway.com

For more information, please visit www.neoway.com

Copyright © 2022, Neoway Technology Co., Ltd. All rights reserved.

