

FEATURES

1. Better price and higher performance
2. Support small customization on typical parameter
3. Flexible and low cost as discrete component
4. Continuous short-circuit protection
5. No-load input current as low as 8mA
6. I/O isolation test voltage: 1.5k VDC
7. Industry standard pin-out
8. Operating ambient temperature range: -50°C to +105°C
9. Full load start up at -50°C
10. Continuous short-circuit protection
11. Support Hot Plug
12. Load regulation rate lower to 7%



3 years
Warranty

Selection Guide

Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF) Max.
	Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
B0503S-1WR3K	5 (4.5-5.5)	3.3	303/30	72/78	2400
B0505S-1WR3K		5	200/20	84.5/86.5	2400
B0509S-1WR3K		9	111/12	79/85	1000
B0512S-1WR3K		12	84/9	80/85	560
B0515S-1WR3K		15	67/7	80/85	560
B0524S-1WR3K		24	42/4	82/85	220
B1203S-1WR3K	12 (10.8-13.2)	3.3	303/30	72/75	2400
B1205S-1WR3K		5	200/20	77/83	2400
B1209S-1WR3K		9	111/12	78/83	1000
B1212S-1WR3K		12	83/9	76/83	560
B1215S-1WR3K		15	67/7	77/86	560
B1224S-1WR3K		24	42/5	77/82	220
B1505S-1WR3K	15 (13.5-16.5)	5	200/20	76/84	2400
B1509S-1WR3K		9	111/12	76/82	1000
B1512S-1WR3K		12	83/9	76/82	560
B1515S-1WR3K		15	67/7	77/83	560
B1524S-1WR3K		24	42/5	77/82	220
B2403S-1WR3K		24 (21.6-26.4)	3.3	303/30	69/77
B2405S-1WR3K	5		200/20	73/80	2400
B2409S-1WR3K	9		111/12	74/80	1000
B2412S-1WR3K	12		83/9	75/82	560
B2415S-1WR3K	15		67/7	75/84	560
B2424S-1WR3K	24		42/5	75/83	220

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	3.3V input	3.3VDC output	-	384/10	405/--	mA
		Other output	-	370/18	389/--	

Input Current (full load / no-load)	5V input	3.3VDC output	-	271/8	286/--	mA
		5VDC output	-	244/8	257/--	
		9VDC/12VDC/15VDC output	-	241/12	254/--	
		24VDC output	-	241/18	254/--	
	12V input	3.3VDC output	-	112/8	118/--	
		5VDC/9VDC/12VDC output	-	105/8	110/--	
		15VDC/24VDC output	-	103/8	109 /--	
	15V input	5VDC/9VDC/12VDC output	-	84/8	88/--	
		15VDC/24VDC output	-	83/8	87/--	
	24V input	3.3VDC output	-	56/8	61/--	
		5VDC output	-	53/8	58/--	
		9VDC output	-	53/8	57/--	
12VDC/15VDC/24VDC output		-	52/8	56/--		
Reflected Ripple Current		-	15	-		
Surge Voltage(1sec. max.)	3.3VDC input	-0.7	-	5	VDC	
	5VDC input	-0.7	-	9		
	12VDC input	-0.7	-	18		
	15VDC input	-0.7	-	21		
	24VDC input	-0.7	-	30		
Input Filter			Capacitance filter			
Hot Plug			Support			
Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.						

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy		See output regulation curves (Fig. 1)				
Linear Regulation	Input voltage change: ±1%	3.3VDC output	-	-	1.5	-
		Other output	-	-	1.2	
Load Regulation	3.3VDC input 10%-100% load	3.3VDC output	-	12	18	%
		Other output	-	8	15	
	5VDC input 10%-100% load	3.3VDC output	-	15	20	
		5VDC output	-	7	15	
		9VDC output	-	8	10	
		12VDC output	-	7	10	
		15VDC output	-	6	10	
		24VDC output	-	5	10	
	12VDC/15VDC/24VDC input 10%-100% load	3.3VDC output	-	8	20	
		5VDC output	-	5	15	
		9VDC output	-	3	10	
		12VDC output	-	3	10	
15VDC output		-	3	10		
24VDC output		-	2	10		
Ripple & Noise*	20MHz bandwidth	Other output	-	30	75	mVp-p
		24VDC output	-	50	100	
Temperature Coefficient	Full load	-	±0.02	-	%/°C	
Short-Circuit Protection		Continuous, self-recovery				
Note:* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.						

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.		1500	-	-	VDC
	5V input, input-output electric strength test for 1 second with a leakage current of 1mA max.		3000	-	-	
Insulation Resistance	Input-output resistance at 500VDC		1000	-	-	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		-	20	-	pF
Operating Temperature		Derating when operating temperature ≥ 85°C, (see Fig. 2)	-50	-	105	°C
Storage Temperature			-55	-	125	
Case Temperature Rise	Ta=25°C		-	25	-	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds		-	-	300	
Storage Humidity	Non-condensing	5V input	-	-	95	%RH
		Other output	5	-	95	
Vibration	3.3V/12V/15V/24V input		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	3.3V input, full load, nominal input voltage		-	220	-	kHz
	5V input, full load, nominal input voltage		-	270	-	
	12V/15V/24V input, full load, nominal input voltage		-	260	-	
MTBF	MIL-HDBK-217F @ 25°C		3500	-	-	k hours

Mechanical Specifications



Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
Dimensions	11.60 x 6.00 x 10.16 mm
Weight	1.3g (Typ.)
Cooling Method	Free air convection

EMC Specifications

Emissions	CE	CISPR32/EN55032 CLASS B
	RE	CISPR32/EN55032 CLASS B
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. Criteria B

Note: Refer to Fig.4 for recommended circuit test.

Typical Characteristic Curves

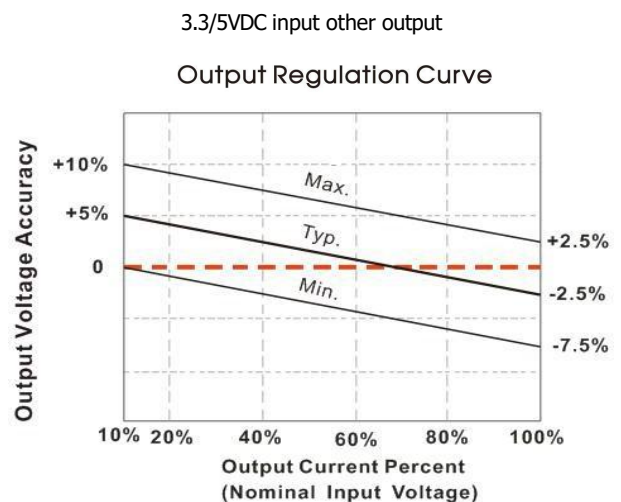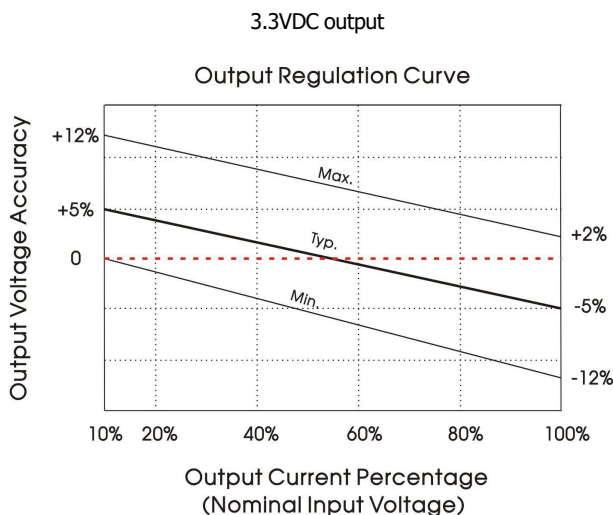

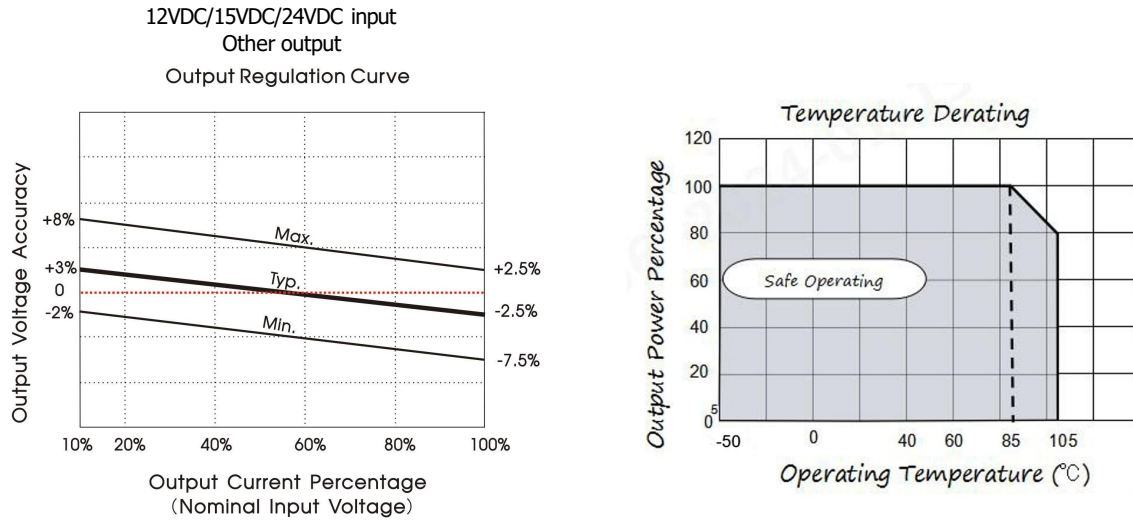


Fig. 2

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

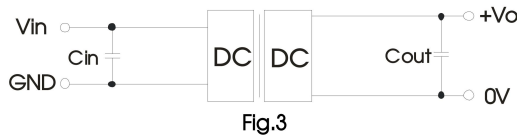


Fig.3

Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
3.3VDC	10µF/25V	3.3VDC	10µF/16V
5VDC	4.7µF/16V	5VDC	10µF/16V
12VDC	2.2µF/25V	9VDC	2.2µF/16V
15VDC	2.2µF/25V	12VDC	2.2µF/25V
24VDC	1µF/50V	15VDC	1µF/25V
-	-	24VDC	1µF/50V

2. EMC compliance circuit


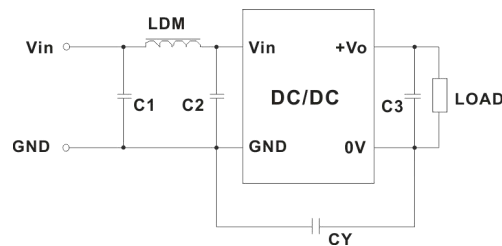


Fig. 4

Table 2: Recommended EMC filter values

Input voltage	3.3VDC		5VDC		12/15/24VDC	
Output voltage	3.3/5VDC	9/12/15/24VDC	3.3/5/9VDC	12/15/24VDC	-	
Emissions	C1/C2	4.7µF/16V	4.7µF/16V	4.7µF/25V	4.7µF/50V	
	CY	-	270pF/4kVDC VISHAY HGZ102MBP	100pF/4kV	1000pF/4kV	270pF/2kV
	C3	Refer to the Cout in table 1				
	LDM	6.8µH				

Dimensions and Recommended Layout

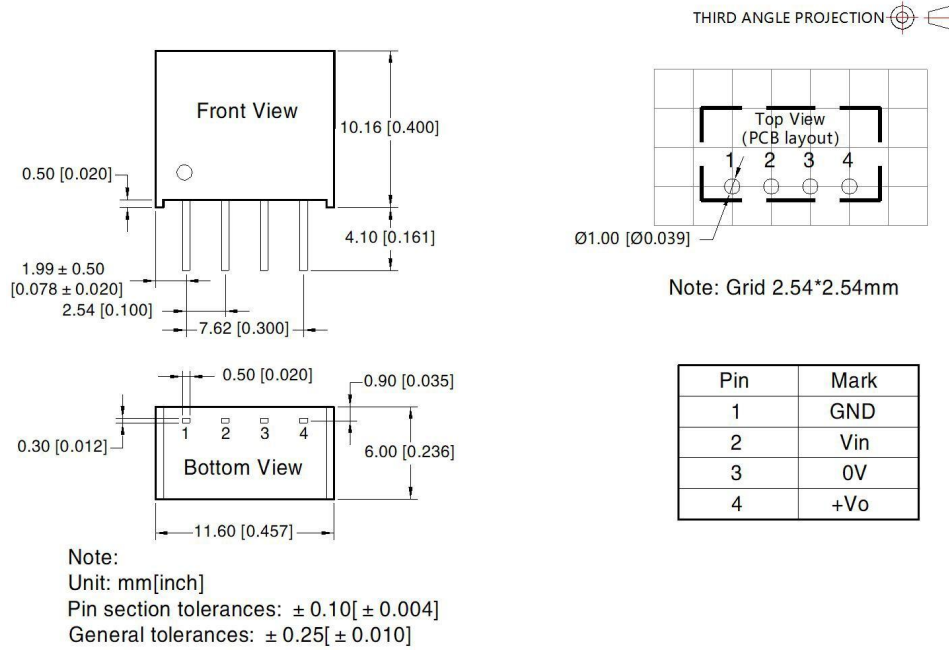

Notes & Instructions

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at Ta=25°C, humidity <75%RH, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;